


HUBER+SUHNER is certified according to  
ISO 9001, ISO 14001, ISO/TS 16949 and IRIS.

**WAIVER**

It is exclusively in written agreements that we provide our customers with warrants and representations as to the technical specifications and/or the fitness for any particular purpose. The facts and figures contained herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only.



HUBER+SUHNER AG  
Business Unit RF Industrial  
Degersheimerstrasse 14  
9100 Herisau/Switzerland  
Tel. +41 71 353 4111  
Fax +41 71 353 4647  
info@hubersuhner.com

84068669/11.2008

hubersuhner.com



# EACON

## Field mountable microwave cable

Edition 2008



Easy connected





### Your partner for system solutions

The HUBER+SUHNER Group is a leading global supplier of components and systems for electrical and optical connectivity.

Our customers in Communications, Industrial and Transportation markets appreciate that we are specialists with detailed knowledge of practical applications. We offer technical expertise in radio frequency technology, fiber optics and low-frequency under one roof, thus providing a unique basis for continual innovation focused on the needs of our customers all over the world.

## EACON, the field mountable microwave cable assembly

To suit to the needs of the customers, HUBER+SUHNER has developed this innovative solution. EACON stands for a simple, flexible and fast way to assemble microwave cable and connectors in the field without compromises to the best performance. The new field mountable microwave cable and connectors are light and waterproofed, built for frequencies up to 6 GHz - ready for use in the aviation and defence market as well as generally in the industrial market.



## EACON 4C - customer need

### Features

- Easy assembling - only two connector parts
- Waterproof IP 68
- Low loss
- Excellent return loss up to 6 GHz
- Extremely reliable
- Assembling tool kit for field mounting
- SMA, N, TNC connectors


### Applications

The EACON 4C family has been developed for the easy assembling in the defence and industrial market.



# EACON 4C, the field mountable microwave cable assembly

## Cable Design

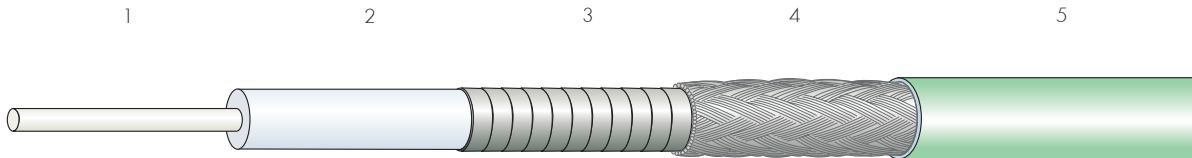

### Construction

|   | Material         | Diameter                             |                      |
|---|------------------|--------------------------------------|----------------------|
| 1 | Centre conductor | Silver-plated copper wire, solid     | 1.40 mm (0.055 inch) |
| 2 | Dielectric       | Extruded low density PTFE            | 4.10 mm (0.161 inch) |
| 3 | Inner shield     | Silver-plated copper tape            | 4.35 mm (0.171 inch) |
| 4 | Outer shield     | Silver-plated copper braid           | 4.85 mm (0.191 inch) |
| 5 | Jacket           | Fluorinated Ethylene Propylene (FEP) | 5.50 mm (0.216 inch) |

### Electrical characteristics

|  |                                |
|--|--------------------------------|
| Impedance                                | $50 \pm 1 \Omega$              |
| Operating frequency                      | 6.0 GHz                        |
| Capacitance                              | 87 pF/m (26.5 pF/ft)           |
| Velocity of propagation                  | 77%                            |
| Signal delay                             | 4.3 ns/m (1.31 ns/ft)          |
| Nominal phase                            | 1564.6°/GHz/m (477.0°/GHz/ft)  |
| Insertion loss stability vs. temperature | $\leq 0.0021 / ^\circ\text{C}$ |
| Insertion loss stability vs. bending     | 0.20 dB                        |
| Screening effectiveness up to 6 GHz      | > 90 dB                        |
| Attenuation                              | See graph 1                    |
| Power handling                           | See graph 2                    |

### Mechanical characteristics

|                     |               |
|---------------------|---------------|
| Weight              | <72 g/m       |
| Min. bending radius | 16 mm         |
| Crush resistance    | 800 N / 100mm |


### Environmental characteristics

|                             |   |
|-----------------------------|---|
| Operating temperature range | -65° to +200°C  |
| IP rating                   | IP 68   |
| Smoke index                 | Naval engineering Standard 711 and ASTM-B 622-92 (140°F for 24 hours, conditioned @ 73°F and 50% relative humidity) |
| Solar radiation             | MIL-STD-810, Method 505, Procedure II   |
| Flammability                | MIL-C-87104, Paragraph 4.6.4.8  |
| Chemical resistance         | British Standard 3G100, Part 2, Section 3, Class A  |
| Halogen free product        | No  |
| Fungus                      | MIL-STD-810, Method 508.3   |
| RoHS (2002/95/EC)           | Compliant   |




# EACON 4C technical data

Graph 1: Cable attenuation (25 °C ambient temperature)

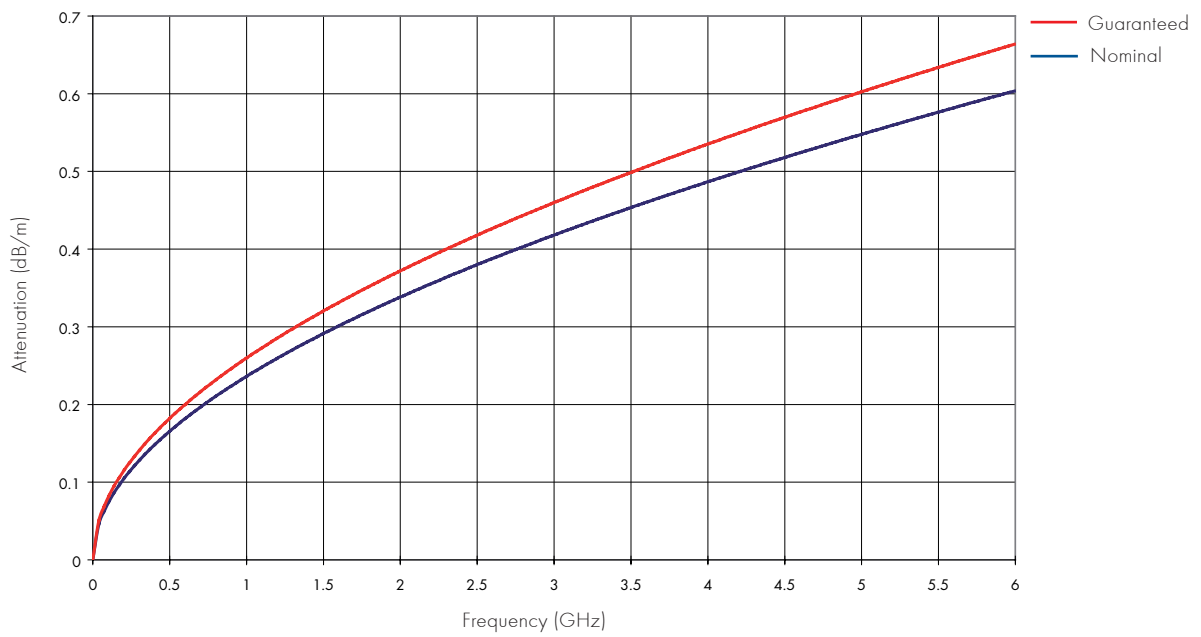

Graph 2: Max. power handling (40 °C ambient temperature and sea level)

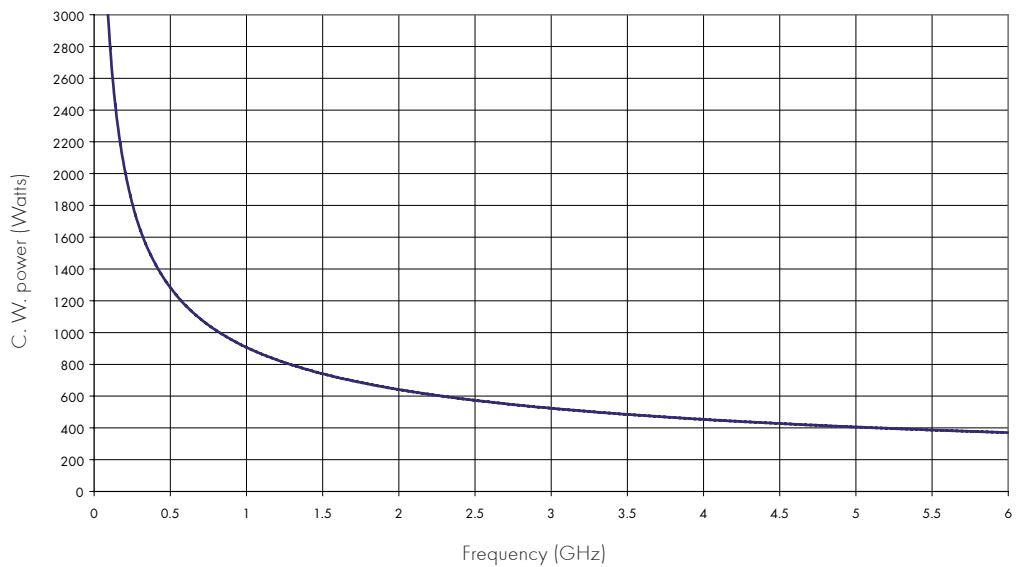

## EACON 4C suitable SMA cable connectors

### Electrical Data

|                          |         |
|--------------------------|---------|
| Impedance                | 50 Ω    |
| Max. operating frequency | 6.0 GHz |

### Mechanical Data

|                       |                   |
|-----------------------|-------------------|
| Centre contact        | plugged           |
| Outer contact         | clamped           |
| Cable retention force | min. 180 N/1 min. |

### Environmental Data

|                       |                  |
|-----------------------|------------------|
| Operating temperature | -65°C to + 165°C |
| IP rating             | IP 68            |
| 2002/95/EC (RoHS)     | compliant        |

### Material Data

### Material

### Surface Plating

|                |                        |                                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold plating (nickel underplated) |
| Outer contact  | Stainless Steel        | Passivated                        |
| Insulator      | PTFE                   |                                   |
| Gasket         | MVQ (Silicone Rubber)  |                                   |
| Fastening nut  | Stainless Steel        | Passivated                        |

| Series, pattern        | HUBER +SUHNER connector type | Item no. | VSWR up to 6.0 GHz       | Drawing |
|------------------------|------------------------------|----------|--------------------------|---------|
| Straight cable plug    | 11_SMA-50-4-101/199_NE       | 84070289 | 1.06 + 0.01*f (f in GHz) | Fig. 1  |
| Right angle cable plug | 16_SMA-50-4-165/199_NE       | 84070290 | 1.12 + 0.03*f (f in GHz) | Fig. 2  |

Fig. 1


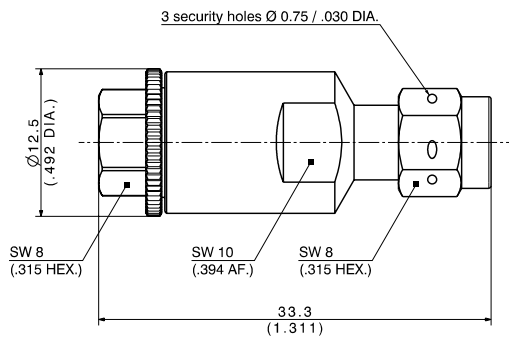


Fig. 2

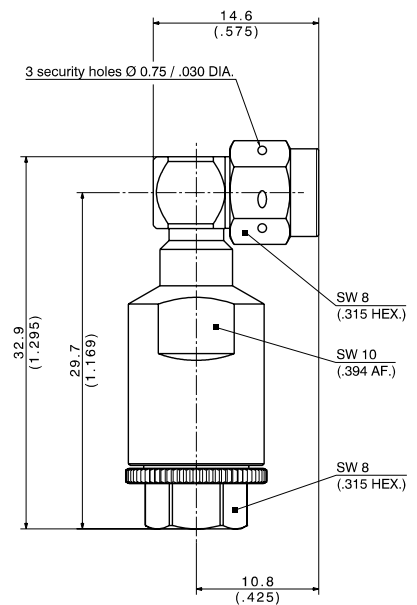

## EACON 4C suitable TNC cable connectors

### Electrical Data

|                 |             |
|-----------------|-------------|
| Impedance       | 50 $\Omega$ |
| Frequency range | 6.0 GHz     |

### Mechanical Data

|                       |                   |
|-----------------------|-------------------|
| Centre contact        | plugged           |
| Outer contact         | clamped           |
| Cable retention force | min. 180 N/1 min. |

### Environmental Data

|                       |                  |
|-----------------------|------------------|
| Operating temperature | -65°C to + 165°C |
| IP rating             | IP 68            |
| 2002/95/EC (RoHS)     | compliant        |

### Material Data

### Material

### Surface Plating

|                |                        |                                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold plating (nickel underplated) |
| Outer contact  | Brass                  | Nickel plating                    |
| Insulator      | PTFE                   |                                   |
| Gasket         | MVQ (Silicone Rubber)  |                                   |
| Fastening nut  | Stainless Steel        | Passivated                        |

### Series, pattern

### HUBER +SUHNER connector type

### Item no.

### VSWR up to 6.0 GHz

### Drawing

|   |                       |          |                            |        |
|---|-----------------------|----------|----------------------------|--------|
| Straight cable plug                     | 11_TNC-50-4-23/12_NE  | 84070283 | 1.072 + 0.013*f (f in GHz) | Fig. 1 |
| Right angle cable plug                  | 16_TNC-50-4-101/12_NE | 84070284 | 1.072 + 0.038*f (f in GHz) | Fig. 2 |
| Straight panel cable jack, flange mount | 25_TNC-50-4-18/122_NE | 84070285 | 1.072 + 0.013*f (f in GHz) | Fig. 3 |

Fig. 1

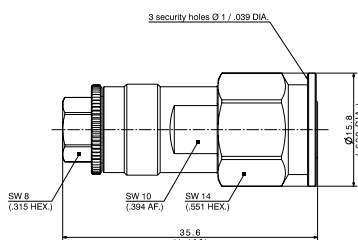


Fig. 2


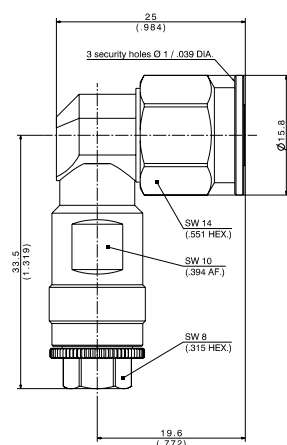


Fig. 3

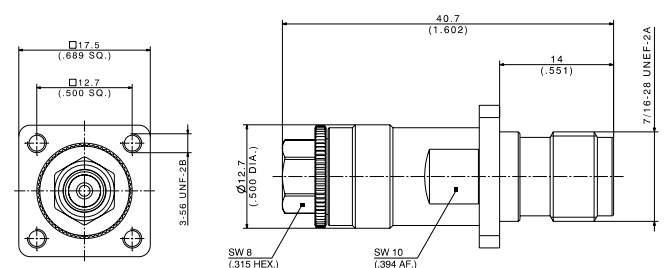

## EACON 4C suitable N cable connectors

### Electrical Data

|                 |         |
|-----------------|---------|
| Impedance       | 50 Ω    |
| Frequency range | 6.0 GHz |

### Mechanical Data

|                       |                   |
|-----------------------|-------------------|
| Centre contact        | plugged           |
| Outer contact         | clamped           |
| Cable retention force | min. 180 N/1 min. |

### Environmental Data

|                       |                  |
|-----------------------|------------------|
| Operating temperature | -65°C to + 165°C |
| IP rating             | IP 68            |
| 2002/95/EC (RoHS)     | compliant        |

### Material Data

### Material

### Surface Plating

|                |                        |                                   |
|----------------|------------------------|-----------------------------------|
| Centre contact | Copper Beryllium Alloy | Gold plating (nickel underplated) |
| Outer contact  | Brass                  | Nickel plating                    |
| Insulator      | PTFE                   |                                   |
| Gasket         | MVQ (Silicone Rubber)  |                                   |
| Fastening nut  | Stainless Steel        | Passivated                        |

### Series, pattern

### HUBER +SUHNER connector type

### Item no.

### VSWR up to 6.0 GHz

### Drawing

|   |                    |          |                                |        |
|---|--------------------|----------|--------------------------------|--------|
| Straight cable plug                     | 11_N-50-4-19/12_NE | 84070286 | $1.072 + 0.013 * f$ (f in GHz) | Fig. 1 |
| Right angle cable plug                  | 16_N-50-4-13/12_NE | 84070287 | $1.072 + 0.038 * f$ (f in GHz) | fig. 2 |
| Straight panel cable jack, flange mount | 25_N-50-4-8/122_NE | 84070288 | $1.072 + 0.013 * f$ (f in GHz) | fig. 3 |

Fig. 1

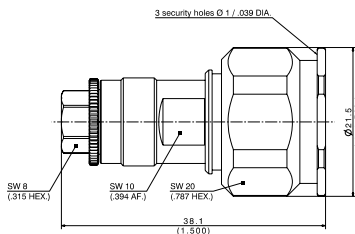


Fig. 2


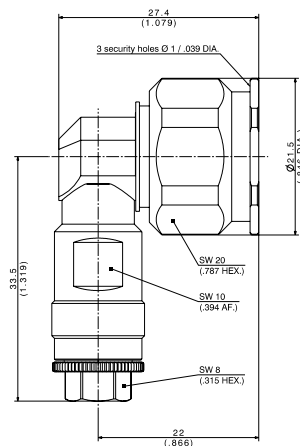


Fig. 3





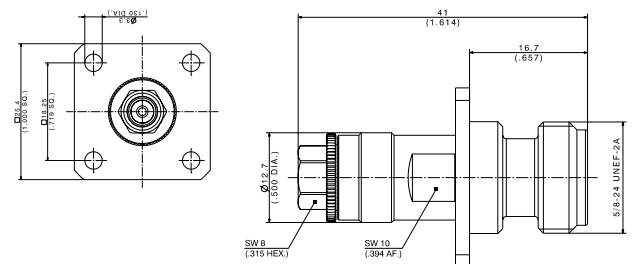

## EACON 4C, assembling tool kit

Assembling tool kit for all connectors, used with EACON 4C cable (with additional space for other auxiliary tools and spare parts).

| HUBER + SUHNER type | Item no. | Content  | Size  |
|---------------------|----------|--|---|
| 74_Z-0-0-606        | 84074447 | all tools, needed to assemble the EACON 4C cable | 395 x 315 x 100mm/<br>15.5 x 12.4 x 3.9 in. |



### Our core competencies

- Worldwide field of activity
- Own research, development and production
- Design-in and engineering of RF interconnect solutions
- Development of customized solutions
- Customized qualifications
- Prototypes and series production
- Own mechanical, electrical and environmental testing capabilities
- EMC optimized solutions

